



BSI Standards Publication

## Piston-operated volumetric apparatus

---

Part 3: Burettes

## National foreword

This British Standard is the UK implementation of EN ISO 8655-3:2022. It is identical to ISO 8655-3:2022. It supersedes BS EN ISO 8655-3:2002, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee LBI/1/2, Laboratory Equipment.

A list of organizations represented on this committee can be obtained on request to its committee manager.

### Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2022  
Published by BSI Standards Limited 2022

ISBN 978 0 539 00513 4

ICS 17.060; 71.040.20

### Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2022.

### Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

---

EUROPEAN STANDARD

**EN ISO 8655-3**

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2022

ICS 17.060

Supersedes EN ISO 8655-3:2002, EN ISO 8655-3:2002/AC:2009

English Version

**Piston-operated volumetric apparatus - Part 3: Burettes  
(ISO 8655-3:2022)**Appareils volumétriques à piston - Partie 3: Burettes  
(ISO 8655-3:2022)Volumenmessgeräte mit Hubkolben - Teil 3: Büretten  
(ISO 8655-3:2022)

This European Standard was approved by CEN on 11 February 2022.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG**CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels**

## European foreword

This document (EN ISO 8655-3:2022) has been prepared by Technical Committee ISO/TC 48 "Laboratory equipment" in collaboration with Technical Committee CEN/TC 332 "Laboratory equipment" the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2022, and conflicting national standards shall be withdrawn at the latest by November 2022.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 8655-3:2002.

Any feedback and questions on this document should be directed to the users' national standards body/national committee. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## Endorsement notice

The text of ISO 8655-3:2022 has been approved by CEN as EN ISO 8655-3:2022 without any modification.

# Contents

	Page
Foreword.....	iv
Introduction.....	v
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Principle of operation.....</b>	<b>1</b>
<b>5 Adjustment.....</b>	<b>2</b>
5.1 Basis of adjustment.....	2
5.2 Initial adjustment.....	2
5.3 Subsequent adjustment.....	2
<b>6 Metrological performance requirements.....</b>	<b>3</b>
6.1 General.....	3
6.2 Calculation of maximum permissible errors not given in <a href="#">Tables 1</a> and <a href="#">2</a> .....	3
<b>7 User information.....</b>	<b>5</b>
<b>8 Marking.....</b>	<b>6</b>
8.1 Piston burettes.....	6
8.2 Change-over units (if applicable).....	6

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 48, *Laboratory equipment*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 332, *Laboratory equipment*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 8655-3:2002), which has been technically revised. It also incorporates the Technical Corrigendum ISO 8655-3:2002/Cor.1:2008.

The main changes are as follows:

- ISO 8655-7 and ISO 8655-8 have been added as normative references;
- [Tables 1](#) and [2](#) have been revised.

A list of all parts in the ISO 8655 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The ISO 8655 series addresses the needs of:

- manufacturers, as a basis for quality control including, where appropriate, the issuance of manufacturer's declarations;
- calibration laboratories, test houses, users of the equipment and other bodies as a basis for independent calibration, testing, verification and routine tests.

The tests specified in the ISO 8655 series are intended to be carried out by trained personnel.





# Piston-operated volumetric apparatus —

## Part 3: Burettes

### 1 Scope

This document specifies

- metrological requirements,
- maximum permissible errors,
- requirements for marking and
- information to be provided for users,

for burettes. This document is applicable to burettes with nominal volumes up to 100 ml, designed to deliver their specified volume (Ex).

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696:1987, *Water for analytical laboratory use — Specification and test methods*

ISO 8655-1, *Piston-operated volumetric apparatus — Part 1: Terminology, general requirements and user recommendations*

ISO 8655-6, *Piston-operated volumetric apparatus — Part 6: Gravimetric reference measurement procedure for the determination of volume*

ISO 8655-7, *Piston-operated volumetric apparatus — Part 7: Alternative measurement procedures for the determination of volume*

ISO 8655-8, *Piston-operated volumetric apparatus — Part 8: Photometric reference measurement procedure for the determination of volume*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8655-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 4 Principle of operation

Burettes are used for the accurate delivery of liquids. In contrast with pipettes, dispensers and dilutors, which are designed to dispense accurately preselected volumes, burettes are required to dispense

volumes of liquids until external criteria such as pH or conductivity are met, at which point it is necessary to know the accurate volume dispensed.

The piston can be operated manually, electrically, pneumatically or hydraulically. The volume delivered can be indicated mechanically or by electronic means. The drive, the piston and the cylinder can be one unit, or modular to permit the use of different pistons and cylinders (change-over units) with the same drive.

Prior to delivery, the piston system is charged by aspiration of liquid from a reservoir. After air-bubble-free filling of the system, movement of the piston in one direction dispenses the liquid whose volume is to be measured; movement in the other direction recharges the system from the reservoir (see [Figure 1](#)).

Burettes may or may not be equipped with valves or may have several piston/cylinder systems which dispense continuously.

Manufacturers' instruction manuals should contain detailed and specific information about the proper operation of burettes.

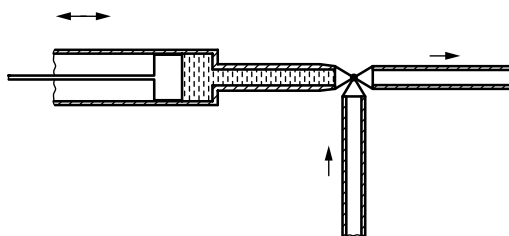


Figure 1 — Schematic drawing of a piston burette

## 5 Adjustment

### 5.1 Basis of adjustment

A burette shall be adjusted for the delivery (Ex) of its nominal volume (or selected volume, in the case of a variable-volume model).

For countries that have adopted the standard reference temperature of 20 °C, the adjustment shall be for the temperature of 20 °C, a relative air humidity of 50 % and a barometric pressure of 101,3 kPa, when handling grade 3 water as specified in ISO 3696:1987.

For those countries that have adopted a standard reference temperature of 27 °C, the adjustment shall be for the temperature 27 °C, a relative air humidity of 50 % and a barometric pressure of 101,3 kPa, when handling grade 3 water as specified in ISO 3696:1987.

### 5.2 Initial adjustment

A burette shall be provided with an initial adjustment.

### 5.3 Subsequent adjustment

Some burettes have provision for adjustment when, for example, it is found upon routine checking that the volume delivered is not within specification. Such adjustment shall be made according to the manufacturer's instructions and by reference to a measurement procedure in accordance with ISO 8655-6, ISO 8655-7 or ISO 8655-8.

Any burette so adjusted shall have clear, visible evidence that the initial adjustment has been modified. This information shall also be recorded.

## 6 Metrological performance requirements

### 6.1 General

In order to state the metrological trueness and precision of the total system of the POVA and thus determine its systematic and random errors, a reference measurement procedure as specified in ISO 8655-6 and ISO 8655-8 or a measurement procedure in accordance with ISO 8655-7 shall be used. The total system consists of the drive and, if applicable, the change-over unit (see [Clause 4](#)) and shall be included with the measurements. The maximum permissible errors given in [Tables 1](#) and [2](#) shall apply.

If metrological performance data are issued for change-over units by the manufacturer, the manufacturer shall specify the combination of drive and change-over unit to which the metrological performance data applies.

### 6.2 Calculation of maximum permissible errors not given in [Tables 1](#) and [2](#)

The calculation of maximum permissible systematic and random error in the usable volume range, not included in [Tables 1](#) and [2](#), shall be made by dividing the nominal volume by the selected volume and multiplying the result by the maximum permissible error at nominal volume. This calculation does not apply to volumes below 10 % of the nominal volume.

[Formula \(1\)](#) shall be applied for the calculation:

$$e_{V_s} = \frac{V_{\text{nom}}}{V_s} \times e_{V_{\text{nom}}} \quad (1)$$

where

$V_{\text{nom}}$  is the nominal volume;

$V_s$  is the selected volume;

$e_{V_{\text{nom}}}$  is the maximum permissible error (either systematic or random) at nominal volume;

$e_{V_s}$  is the maximum permissible error (either systematic or random) at the selected volume.

If the calculated value exceeds 25 %, then the value of 25 % shall be applied as the maximum permissible error.

**EXAMPLE** Hand-driven piston burette with a nominal volume of 5 ml and a usable volume range of 0,5 ml to 5 ml.

Calculation of maximum permissible systematic error at a selected volume of 1 ml:

$$e_{V_{\text{nom}}} = 0,5 \%$$

$$V_{\text{nom}} = 5 \text{ ml}$$

$$V_s = 1 \text{ ml}$$

$$e_{V_s} = \frac{V_{\text{nom}}}{V_s} \times e_{V_{\text{nom}}}$$

$$e_{V_s(1 \text{ ml})} = \frac{5 \text{ ml}}{1 \text{ ml}} \times 0,5 \%$$

$$e_{V_s(1 \text{ ml})} = 5 \times 0,5 \%$$

$$e_{V_s(1 \text{ ml})} = 2,5 \%$$

**Table 1 — Maximum permissible errors for motor-driven piston burettes**

Dispensing volume		Maximum permissible systematic error <sup>a</sup>	Maximum permissible random error <sup>a</sup>
Nominal volumes ml	Setting as a proportion of the nominal volume %		
		±%	% <sup>b</sup>
≤ 1	100	0,60	0,10
	50	1,2	0,20
	10	6,0	1,0
> 1 to 2	100	0,50	0,10
	50	1,0	0,20
	10	5,0	1,0
> 2 to 5	100	0,30	0,10
	50	0,60	0,20
	10	3,0	1,0
> 5 to 25	100	0,20	0,070
	50	0,40	0,14
	10	2,0	0,70
> 25 to 50	100	0,20	0,050
	50	0,40	0,10
	10	2,0	0,50
> 50 to 100	100	0,20	0,030
	50	0,40	0,060
	10	2,0	0,30

<sup>a</sup> To calculate errors in units of millilitres, multiply the maximum permissible errors by the selected volume.

<sup>b</sup> Expressed as the coefficient of variation according to ISO 8655-6, ISO 8655-7, or ISO 8655-8.

**Table 2 — Maximum permissible errors for hand-driven piston burettes**

Dispensing volume		Maximum permissible systematic error <sup>a</sup>	Maximum permissible random error <sup>a</sup>
Nominal volumes ml	Setting as a proportion of the nominal volume %		
		±%	% <sup>b</sup>
≤ 1	100	0,60	0,10
	50	1,2	0,20
	10	6,0	1,0
> 1 to 2	100	0,50	0,10
	50	1,0	0,20
	10	5,0	1,0
> 2 to 10	100	0,30	0,10
	50	0,60	0,20
	10	3,0	1,0
> 10 to 100	100	0,20	0,10
	50	0,40	0,20
	10	2,0	1,0

<sup>a</sup> To calculate errors in units of millilitres, multiply the maximum permissible errors by the selected volume.  
<sup>b</sup> Expressed as the coefficient of variation according to ISO 8655-6, ISO 8655-7, or ISO 8655-8.

## 7 User information

Information essential to the proper use of the burette and its accessories (see ISO 8655-1) shall be provided when making a burette available on the market and shall be as follows.

- a) the basis of adjustment (Ex) at reference conditions according to ISO 8655-1,
- b) nominal volume or usable volume range of the burette; where this is not practicable [see 8.1 a)], information shall be provided to enable the nominal volume to be correctly identified from markings on the appropriate unit or module,
- c) smallest volume which can be delivered observing the maximum permissible errors in accordance with [Clause 6](#),
- d) the correct method of use, including a reference to this document, i.e. ISO 8655-3,
- e) the error limits of the systematic and random error of measurement at the nominal volume, at 50 % of the nominal volume and either at 10 % of the nominal volume or the smallest selectable volume whichever is greater,
- f) information regarding the care, cleaning and maintenance of the burette,
- g) advice about air bubble-free filling,
- h) suggestions as to the basis on which a minimum routine testing protocol can be established including a reference to this document, i.e. ISO 8655-3,
- i) upon request, information regarding the interaction of the materials of the burette with organic and inorganic solutions, solvents and caustic chemicals,
- j) recommendations for the proper storage of the burette.

## 8 Marking

### 8.1 Piston burettes

The following data shall be permanently marked on each piston burette:

- a) nominal volume; where this is not practicable due to a modular design, the volumetric modules shall be marked either with their nominal volumes or information to enable the user to obtain the nominal volume from the user information [see [Clause 7](#), item b)];
- b) unit of measurement;
- c) brand name and/or trademark;
- d) apparatus name or type;
- e) serial number of the burette.

In addition, the following information should be marked:

- f) abbreviation “Ex” and the reference temperature “20 °C” or “27 °C”;
- g) reference to this document, i.e. ISO 8655-3.

### 8.2 Change-over units (if applicable)

The following information shall be permanently printed or labelled on each change-over unit:

- a) brand name and/or trademark;
- b) nominal volume [see [8.1 a\)](#)];
- c) drive for which the change-over unit is suited, including indication of the brand and device designation of the brand (alternatively this information shall be given in the accompanying documentation);
- d) serial number.



# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

## Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than one device provided that it is accessible by the sole named user only and that only one copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than one copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

## Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright and Licensing team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [cservices@bsigroup.com](mailto:cservices@bsigroup.com).

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Useful Contacts

### Customer Services

**Tel:** +44 345 086 9001

**Email:** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 345 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK